


Wire Instructions:

- To activate the unit, extend the red (+) wire to a 12V post. Extend the black (-) wire to the ground post of the vehicle's battery.
- Synchronization: To Sync two or more light heads together:
 - Connect WHITE wires of all heads together for Synchronization
 - All heads must be on same flash pattern to be able to sync.
- To select Flash Pattern, apply YELLOW to RED
 - Less than 1 second for next pattern
 - More than 5 seconds for steady burn or reset
- Pattern alternately: Default

Product Features:

- Powered by DC 9 -30V
- 12 high intensity LED with optic lenses
- Extra steady on functions for vehicle identification or illumination
- 19 Flash Patterns with Pattern Memory
- Wrap around side optic for wider visibility
- Low profile for discreet mounting
- Simultaneously or alternately between multiple units
- Long life LEDs rated to 100,000 hours of reliable operation
- Reverse polarity protection

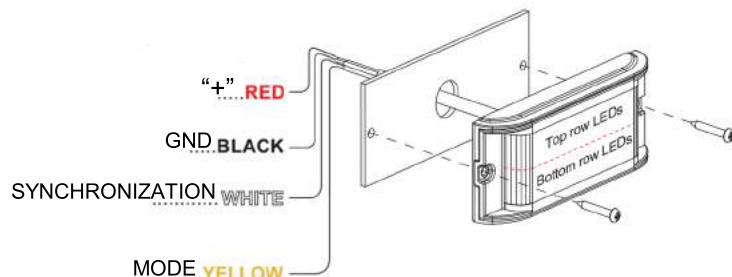


Specifications:

| |
|---|
| LED Power:12PCS 3W |
| Lens: TIR |
| LED Lifespan:100000H |
| Flash Pattern: 19 |
| Input Voltage:9-30V |
| Max Power:36W |
| Max Current:700mA@12.8V DC |
| Ambient Temperature: -30-+70 C |
| Waterproof:IP67 |
| Product Dimension: 130mm L*47mm W*18mm H |
| Mounting:Surface mount |
| Wire: 4 core |
| Cable length:20cm |
| Material:PC housing and aluminum alloy base |


Flash Patterns:

| |
|--|
| Random (default) |
| Single(split) Single H/L(all) |
| Double(split) Steady 2 (california) |
| Quad(split) Steady 4(all) |
| Quint(split) |
| Mega(split) |
| Ultra(split) |
| Single-Quad(split) |
| Single H/L(split) |
| Single(all) |
| Double(all) |
| Quad(all) |
| Quint(all) |
| Mega(all) |
| Ultra(all) |
| Single-Quad(all) |

Pattern Alternately

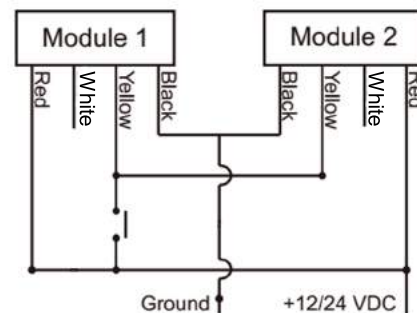

Pattern Synchronization

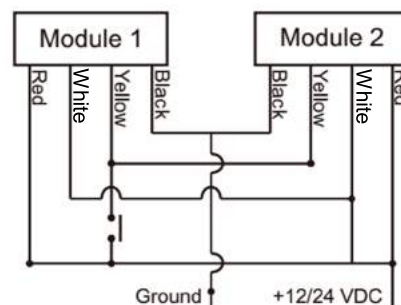

UNIT SIGNAL, INC.

www.unitsignal.com

