



L25 LED SURFACE MOUNT LIGHT



WIRING INSTRUCTIONS

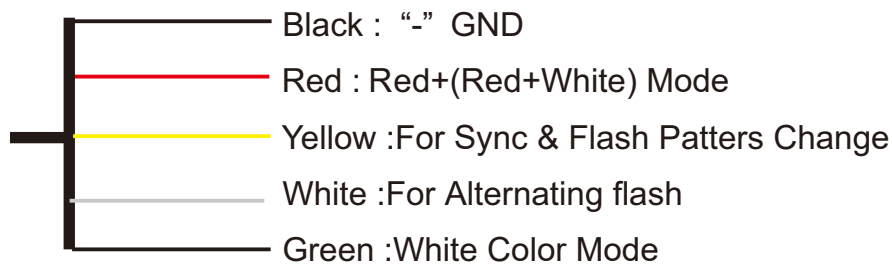

* Green wire is override the red wire

* For sync:

-Connect all the yellow wires together for sync

* Flash pattern: Connect the Yellow wire to positive

-Less than 1 second for the next pattern

-More than 5 seconds for the reset

* For alternating function

-Connect one of the white wire to positive and leave the other unconnected.

TECHNICAL SPECIFICATIONS

Item	L25
Voltage	10-30VDC
LED's	Single color: 12LEDs, Dual color: 24LEDs
Power	3W LEDs
Current Draw	0.8A at 12VDC,0.4A at 24VDC
IP Rating	IP69K
Material Construction	Aluminium Housing, PC Lens
Weight	0.35Kg
Operating Temperature	-40° C~+60° C
Storage Temperature	-40° C~+60° C
Certificate	CE,UKCA,ECE R10 ,R65, SAE

FLASH PATTERNS

#	Patterns(White)	FPM	#	Patterns	FPM
1	Single	150	7	Single+Strobe	/
2	Double	150	8	Single	75
3	Quad	150	9	Single+Single	/
4	Quint	150	10	Combination	/
5	Strobe	1500	11	Power 30%	/
6	Single+Quad	/			

#	Patterns(Red and Red+White)	FPM	#	Patterns	FPM
1	Single	150	12	Single(Split)	300
2	Double	150	13	Double(Split)	300
3	Quad	150	14	Quad(Split)	300
4	Quint	150	15	Quint(Split)	300
5	Strobe	1500	16	Strobe(Split)	35
6	Single+Strobe	/	17	Single+Quad(Split)	/
7	Single+Strobe	/	18	Single+Strobe(Split)	/
8	Single	75	19	Single(Split)	75
9	Single+Single	/	20	Single+Single(Split)	/
10	Combination	/	21	Combination	/
11	Power 30%	/	22	Power 30%	/

TECHNICAL DRAWING

