





## Wire Instructions:

- To activate the unit, extend the **RED** wire to a 12V post. Extend the black (-) wire to the ground post of the vehicle's battery.
- Synchronization: To Sync two or more **beacons** together:
  - Connect **WHITE** wires of all **lights** together for Synchronization
  - All heads must be on same flash pattern to be able to sync.
- To select Flash Pattern, apply **YELLOW** to **BLACK**
  - Less than 1 second for next pattern

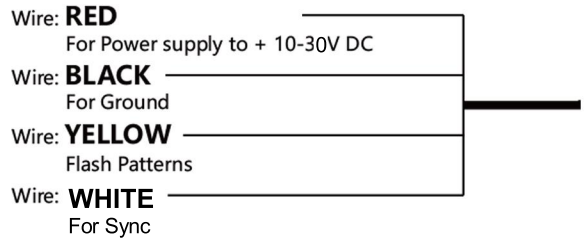

## Product Features:

- Powered by 12-24V
- Multi-units can be synced together (20pcs)
- 7 Flash Patterns with Pattern Memory
- Compliant with ECE R65 TA1; TB1; ECE R10; UKCA; CISPR 25 Class 3.
- Amber, Blue, Clear, and Green lens available
- 18Pcs 1W LEDs
- Permanent mount, Magnet mount, or Flexi Din mount available
- IP67 waterproof designed
- Low profile design

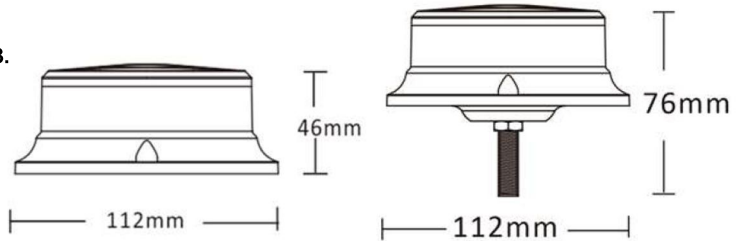

## Specifications:

LED Power: 18 Pcs 1W
Lens: /
LED Lifespan: 100000H
Flash Pattern: 7
Input Voltage: 12-24V
Max Power: 18W
Max Current: 1.7A@12V
Ambient Temperature: -30~+70 C
Waterproof: IP67
Product Dimension: 112mmD*46mmH
Mounting: Bolt, Magnet, Flexi Din
Wire: 4 core
Cable length: 40cm
Material: UV-resistant PC

## Flash Patterns:

ECE R65 Single(all)
ECE R65 Double(all)
Tripe R65
Quad R65
Double flash - slow
Mega flash
Rotate

